

# PA-2000

## ON/OFF Control

The PA-2000 Pneumatic Valve Actuators series is available for ON/OFF control.


The actuator can be combined with VG8000 series valves in accordance with the maximum close-off pressure ratings specified.

The fail safe position of the PA-2000 can be changed in-situ with a conversion kit.

### Features

- Manual override
- Reversible action in-situ
- Accessories available

### Dimensions (in mm)

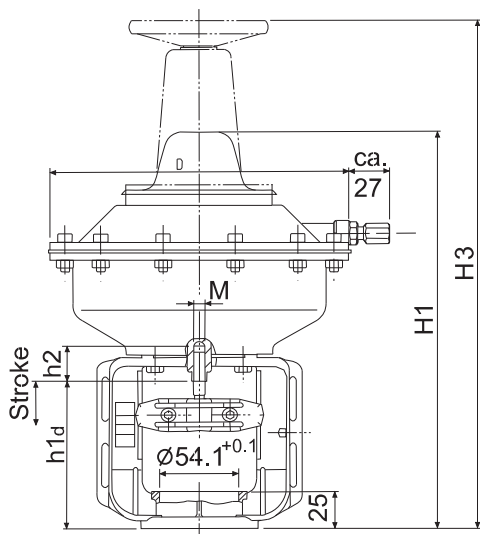

# PA-2000

ON/OFF Control

## Ordering information

| Codes        | Handwheel | Spring range | Positioner (PR10) | Spring return action                    | Diaphragm area      | Stroke |
|--------------|-----------|--------------|-------------------|-----------------------------------------|---------------------|--------|
| PA-2000-3212 | ---       | 20 - 50 kPa  | ---               | Direct Acting<br>Actuator stem extends  | 150 cm <sup>2</sup> | 13 mm  |
| PA-2100-3217 | ■         | 70 - 100 kPa |                   |                                         | 300 cm <sup>2</sup> | 25 mm  |
| PA-2000-3312 | ---       | 20 - 50 kPa  |                   |                                         |                     | 42 mm  |
| PA-2100-3317 | ■         | 70 - 100 kPa |                   |                                         | 600 cm <sup>2</sup> | 25 mm  |
| PA-2000-3612 | ---       | 20 - 50 kPa  |                   |                                         |                     | 42 mm  |
| PA-2100-3617 | ■         | 70 - 100 kPa |                   |                                         |                     | 25 mm  |
| PA-2000-3712 | ---       | 20 - 50 kPa  |                   |                                         |                     | 25 mm  |
| PA-2100-3717 | ■         | 70 - 100 kPa |                   |                                         |                     |        |
| PA-2030-3222 | ---       | 20 - 50 kPa  | ■                 | Reverse Acting<br>Actuator stem extends | 150 cm <sup>2</sup> | 13 mm  |
| PA-2130-3227 | ■         | 70 - 100 kPa |                   |                                         | 300 cm <sup>2</sup> | 25 mm  |
| PA-2030-3322 | ---       | 20 - 50 kPa  |                   |                                         |                     | 42 mm  |
| PA-2130-3327 | ■         | 70 - 100 kPa |                   |                                         | 600 cm <sup>2</sup> | 25 mm  |
| PA-2030-3622 | ---       | 20 - 50 kPa  |                   |                                         |                     | 42 mm  |
| PA-2130-3627 | ■         | 70 - 100 kPa |                   |                                         |                     | 25 mm  |
| PA-2030-3722 | ---       | 20 - 50 kPa  |                   |                                         |                     | 25 mm  |
| PA-2130-3727 | ■         | 70 - 100 kPa |                   |                                         |                     |        |